

EX57-000-MD-PF-3W

WALL ONLY

The EX57-000-MD-PF-3W range of Access Panels are simple to install and suitable for walls where regular maintenance to services is required.

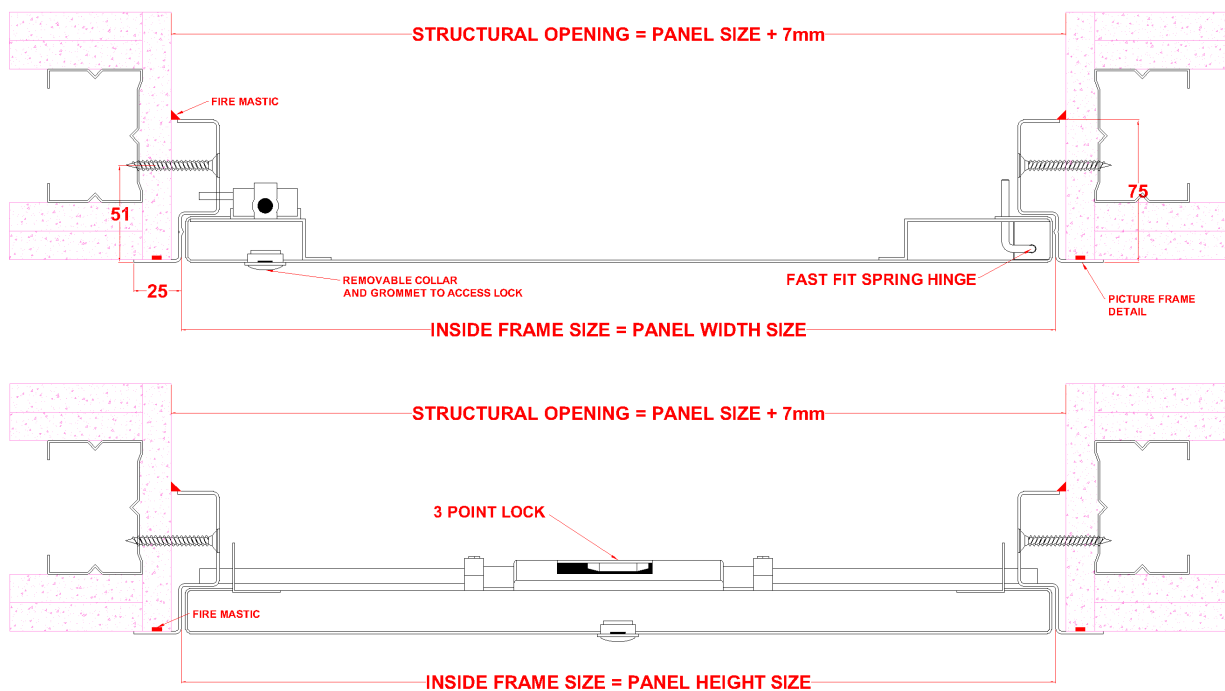
NONE
FIRE RATED



NONE
ACOUSTIC RATED



NONE
AIRTIGHT RATED

Description

This panel is designed to fit into a structural membrane of a joint-less plasterboard wall system. It is manufactured with a 25mm wide picture frame. The panel has a Metal faced door. The panels door leaf is locked in place via a 3 Point Locking System as standard other lock options are available upon request. The Panel is Powder Coated RAL 9010 30% Gloss. Other colours available upon request.

Tests

- The Panel is Non Fire Rated.
- The Panel is not Acoustic rated.
- The Panel is not Air Pressure tested.
- The Panel is not Smoke Tested.

Manufacture

The EX57-000-MD-PF-3W is manufactured from Zintec Steel with a 0.9mm thick Door and a 1.2mm Frame. The panels door leaf is hinged by a Fast Fit Hinge System which saves time on fitting compared to a Full Piano Hinge system.

Seals

Draught Seals **NO** Smoke Seals **NO** Air Seals **NO** Acoustic Seals **NO** Intumescent Seals **NO**

Fitting

Make sure the structural opening is at least 7mm larger than the panel size, back of set frame size. E.G a 607x607mm panel size requires a 607x607mm hole size. Remove the door from the frame and place the frame into the set hole. Fix through the appropriate fixing holes within the fold up fixing tabs ensuring the frame is pushed up against the structural opening surround. Check the frame is square by measuring corner to corner. Refit door and lock in place; the door and frame should be flush. Independent bracing or support may be required to take the weight of the Access Panel.

Tel: +44 (0)24 7635 2771 Fax: +44 (0)24 7635 2761

Email: sales@exitile.com

www.exitile.com

